

1/8

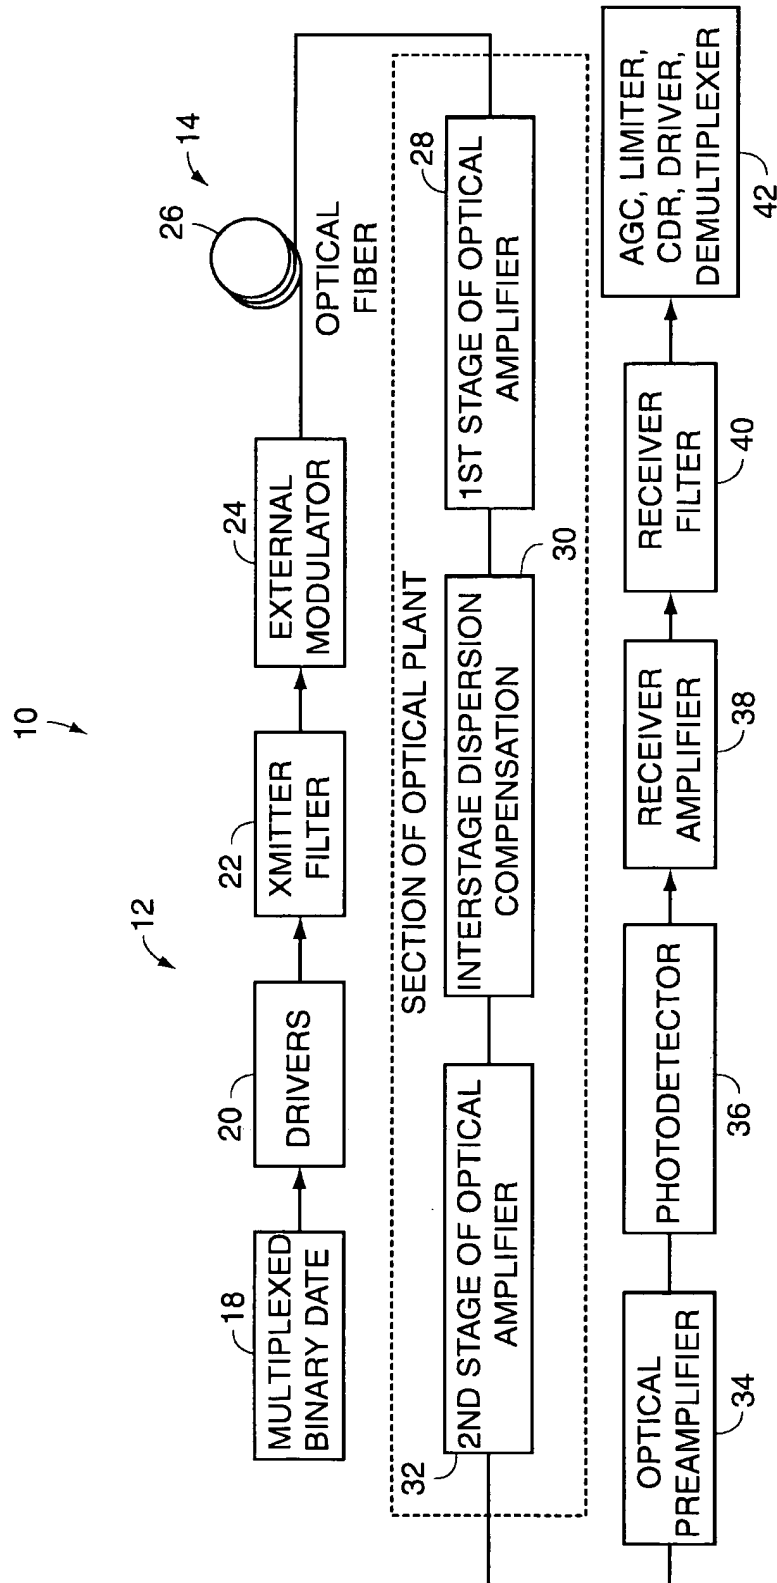


FIG. 1

2/8

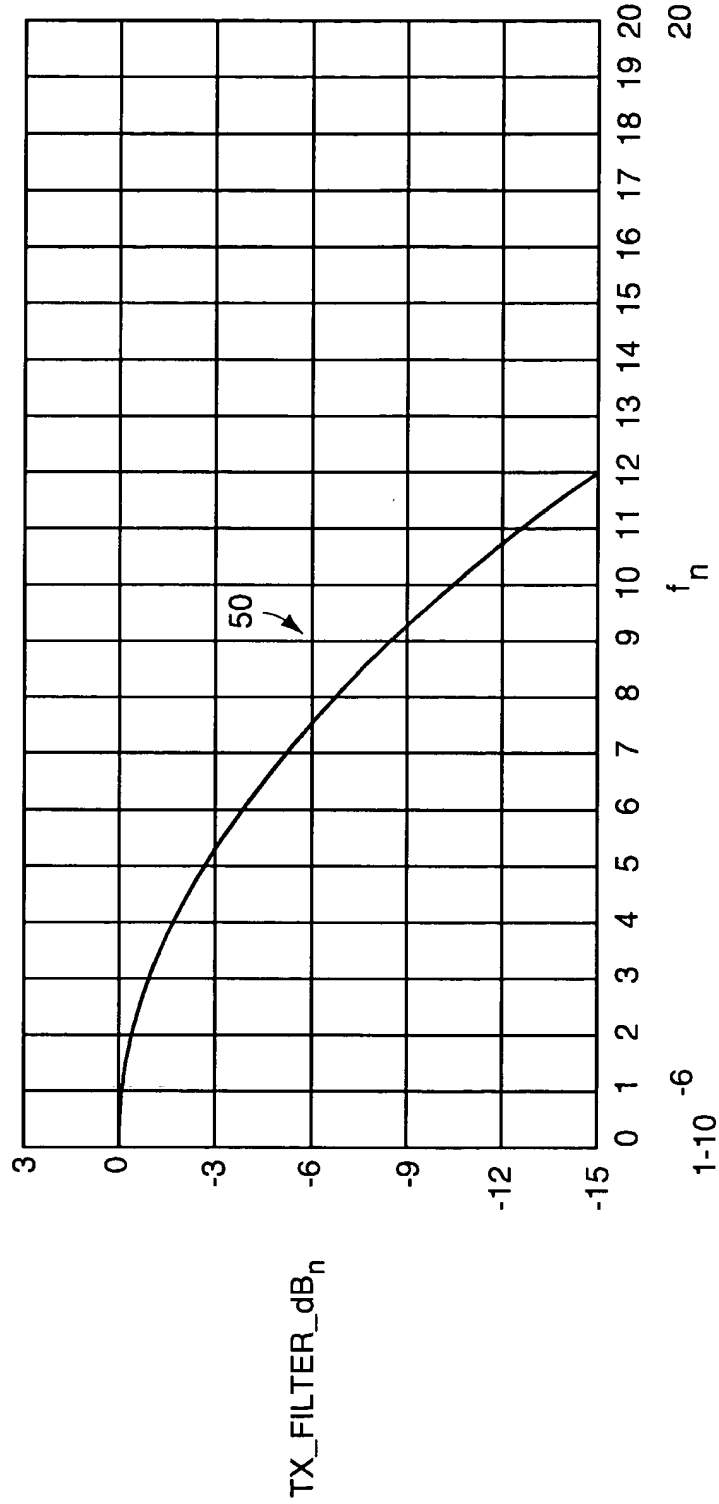


FIG. 2a

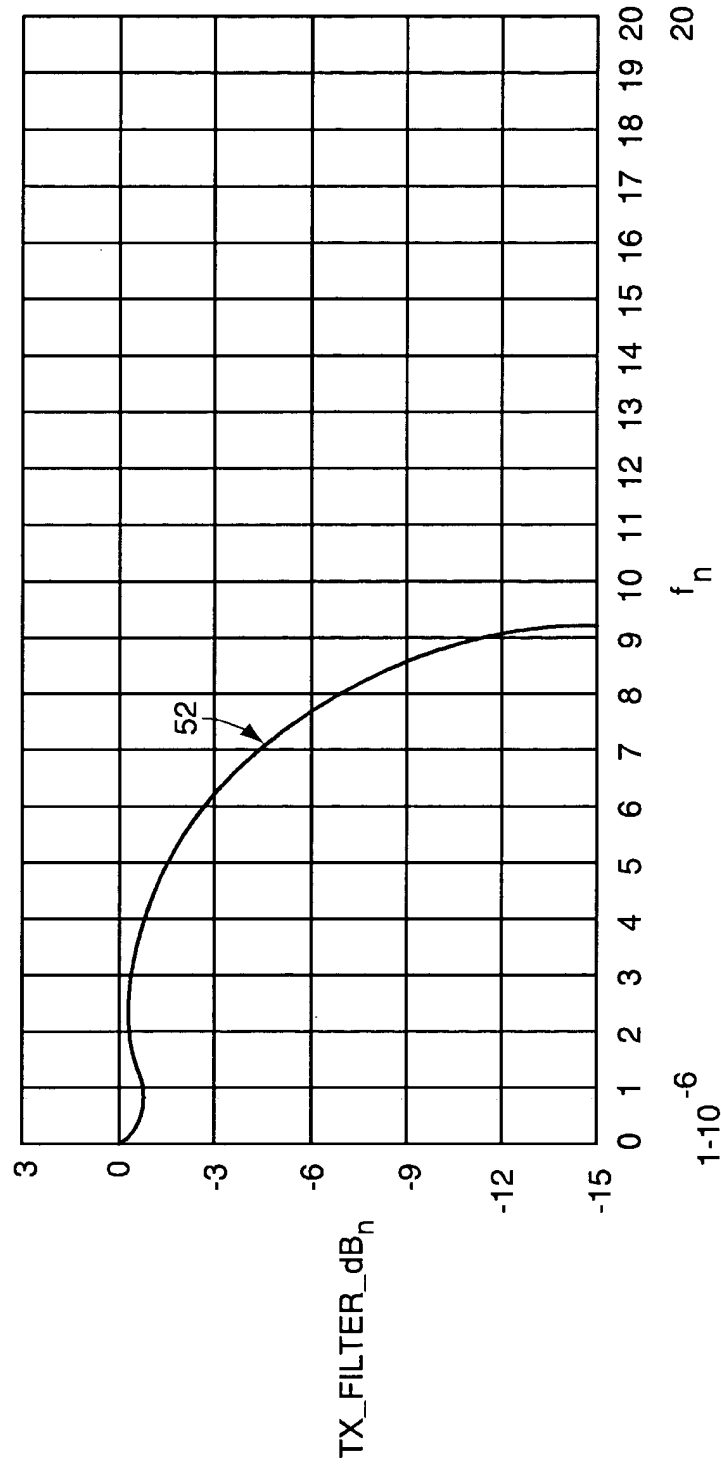


FIG. 2b

4/8

%EXCESS BANDWIDTH OF DESIRED PULSE RESPONSE'S AUTOCORRELATION	RECEIVER PEAKING (dB re d.c.)	ISI LIMITED Q (linear, unit-less) AT RECEIVER
		(n.b. Q=7.13 YIELDS A BIT ERROR RATIO OF 10^{-12})
20	1.73	9.4
25	1.50	9.7
30	1.27	10.9
35	1.12	10.7
40	1.22	9.4
45	1.57	7.9

FIG. 3

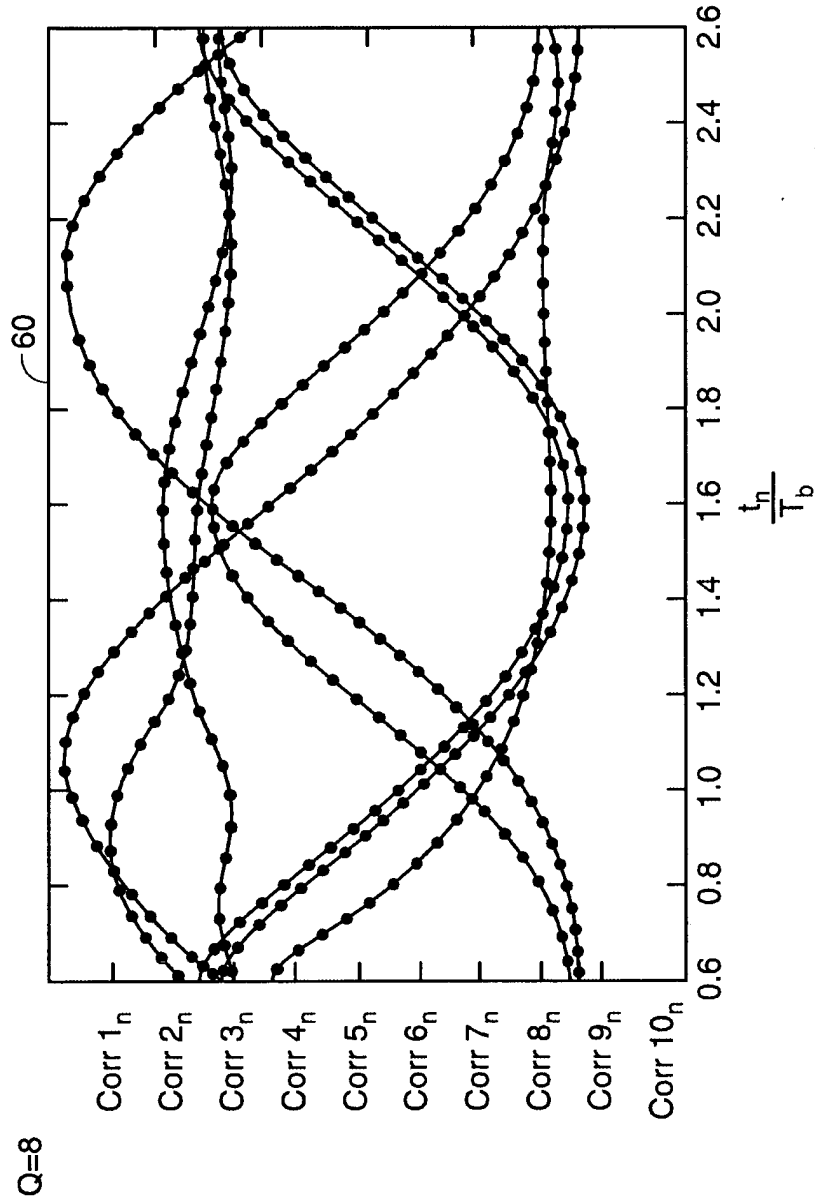


FIG. 4a

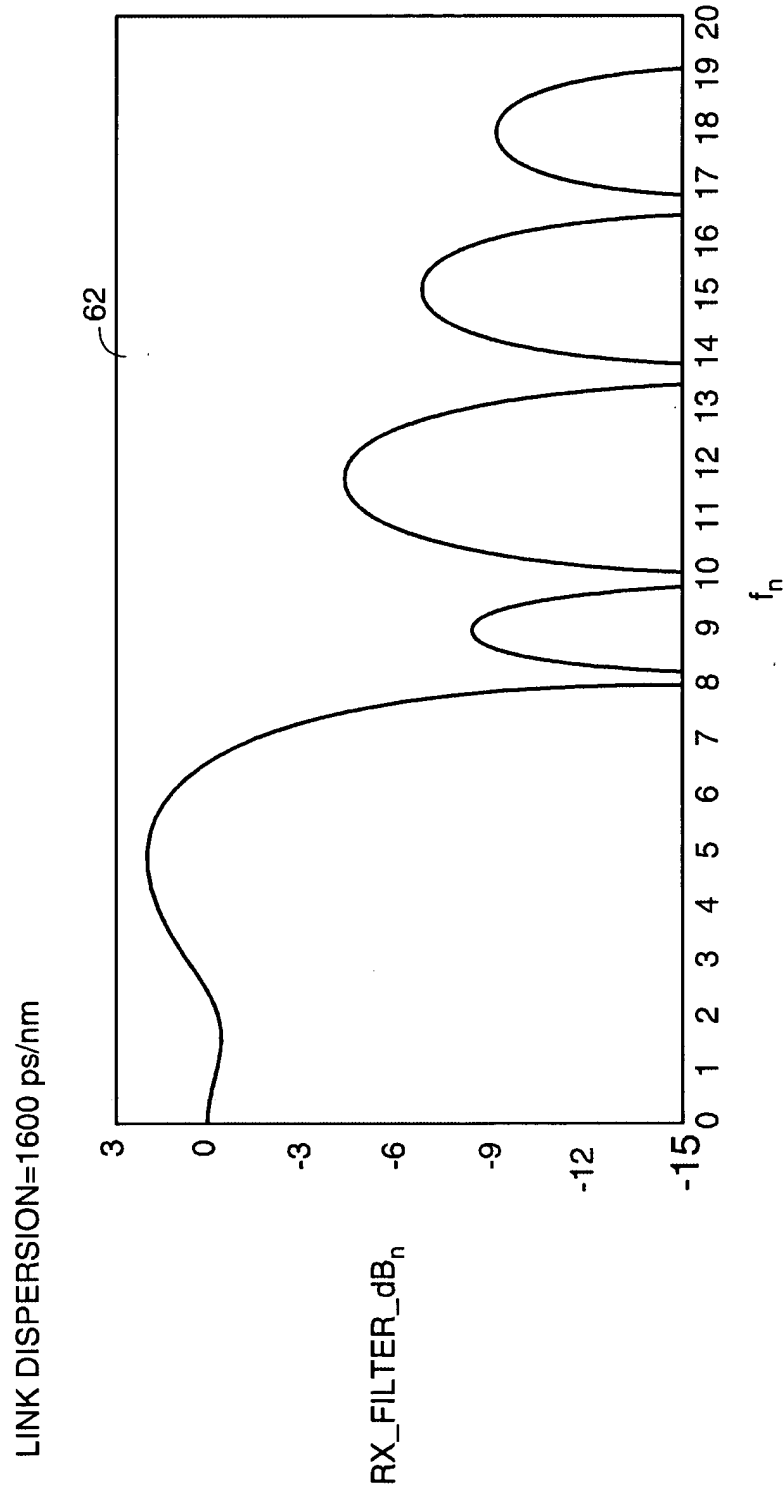


FIG. 4b

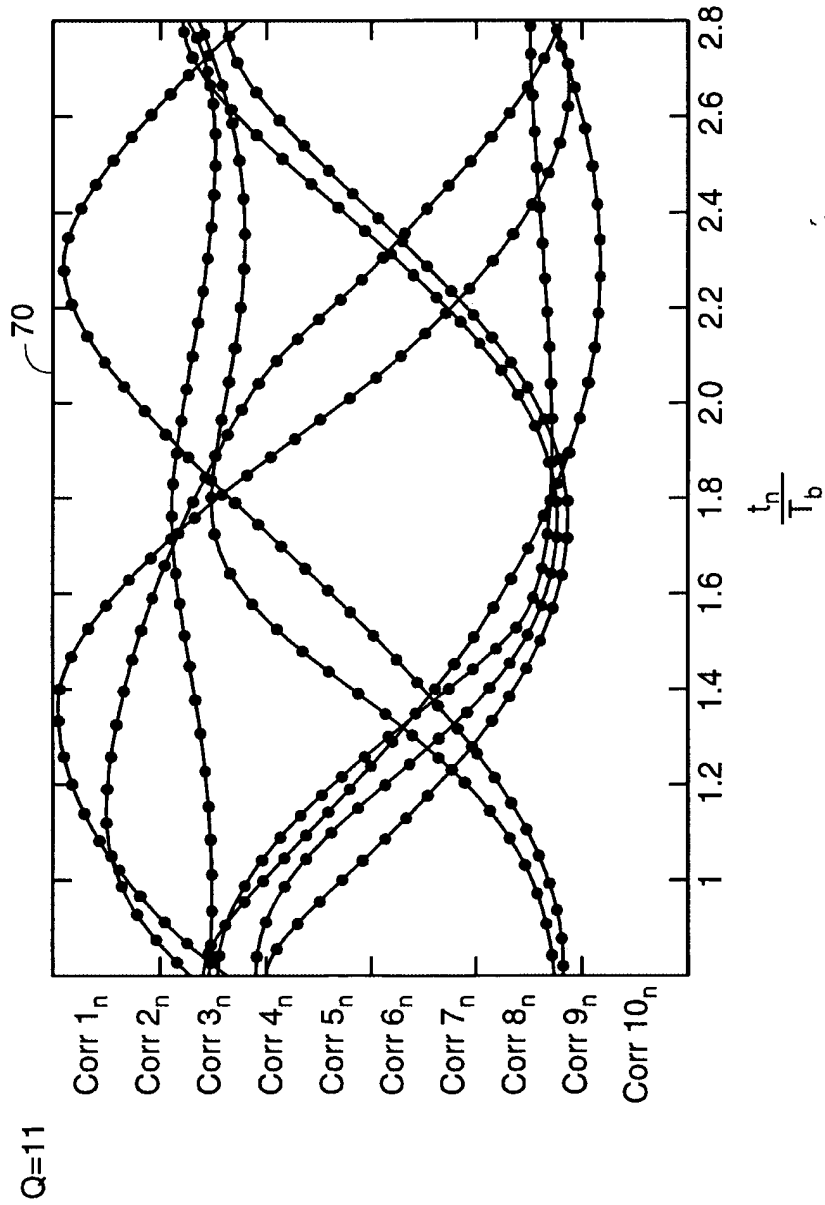


FIG. 5a

8/8

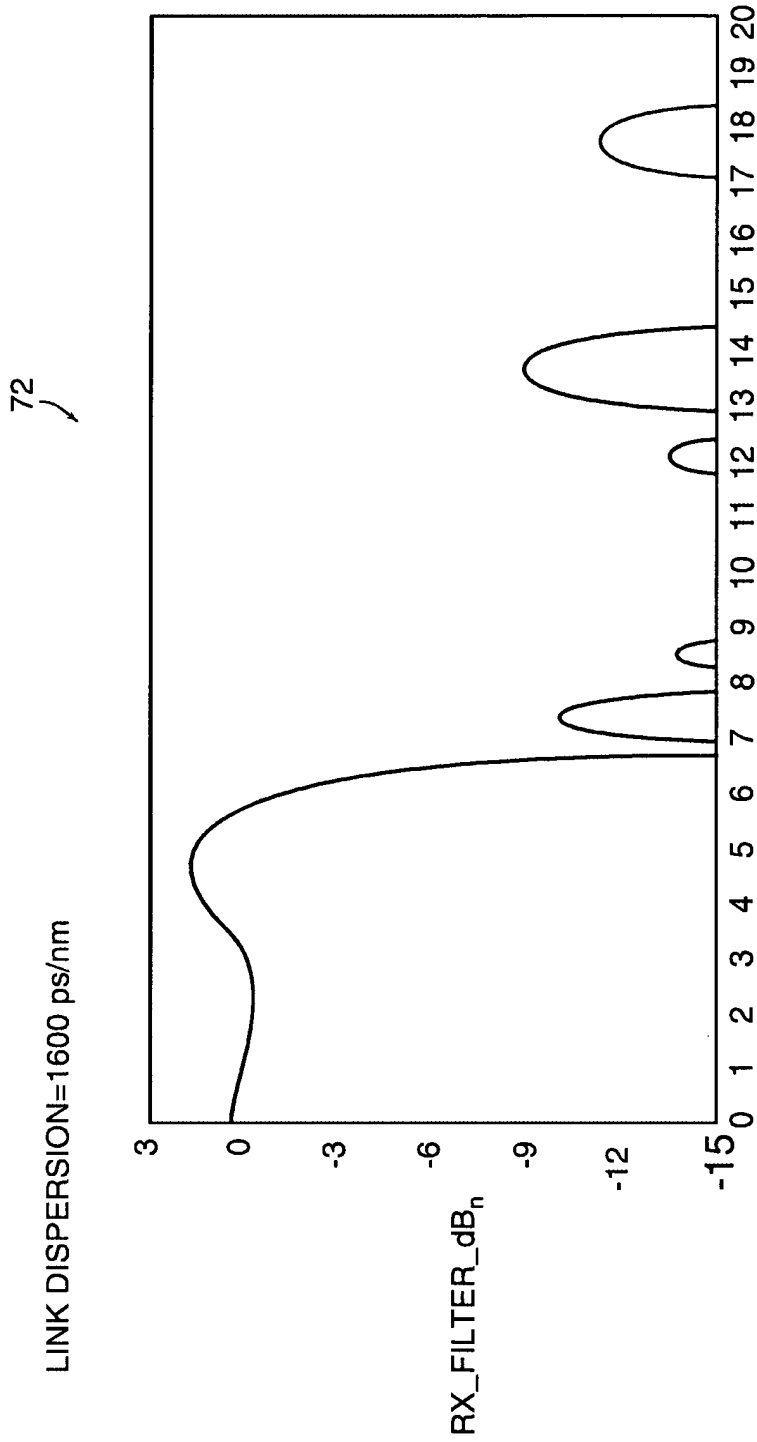


FIG. 5b